



LED Batten for Outdoor Use



Features

- Single ended power for ultimate safety
- Surge protector system
- Low electromagnetic interference
- 45,000 hour lifetime

Applications


- Car parks
- Schools
- Hospitals
- Public buildings

Technical Specification

➤ Beam Angle	140°
➤ Colour Rendering (RA)	80
➤ CCT	4000K, 5000K, 6000K
➤ Operating Temperature	20°~45°
➤ IP Rating	IP65
➤ Certifications	CE & ROHS, 'ECA Compliant', LM-79, LM-80
➤ Driver	Internal
➤ Energy Rating	A
➤ LED Chip	Nichia/ Epistar

Replaces

- 1x25W replaces the Single Batten T8 58W
- 2X25W replaces the Double Batten T8 2x58W

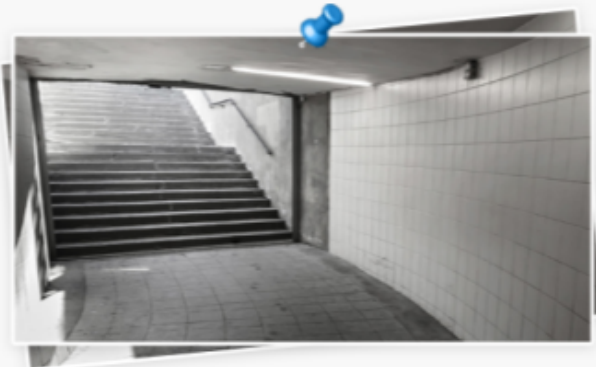

◆ **China Office**
📍 20A, Tower 3, Tianshan Rd 600
Shanghai, 200051, China
🌐 www.ecotecworld.com


◆ **Germany Office**
📍 Kappenberg Hof 8,
D-49843 Uelsen, Germany
🌐 www.ecotecworld.com

◆ **HK office**
📍 Room 1203, Euro Trade
Centre 13-14 Connaught
Road, HK
🌐 www.ecotecworld.com


◆ **UK Office**
📍 30 St Giles Oxford
OX13LE, UK
🌐 www.ecotecworld.com



Light Distribution Curves 58W

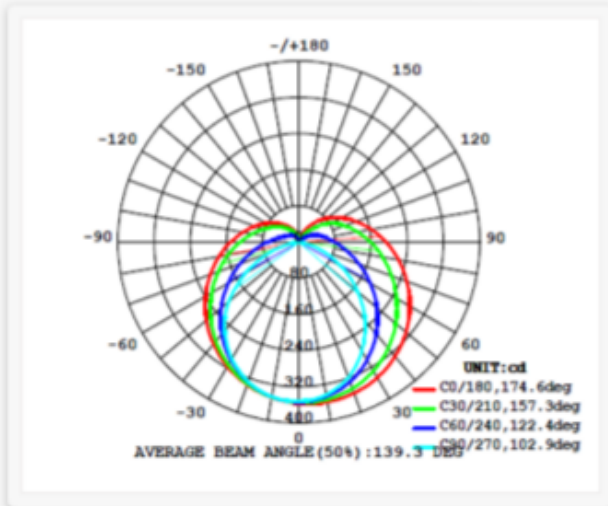

Colour Rendering 58W

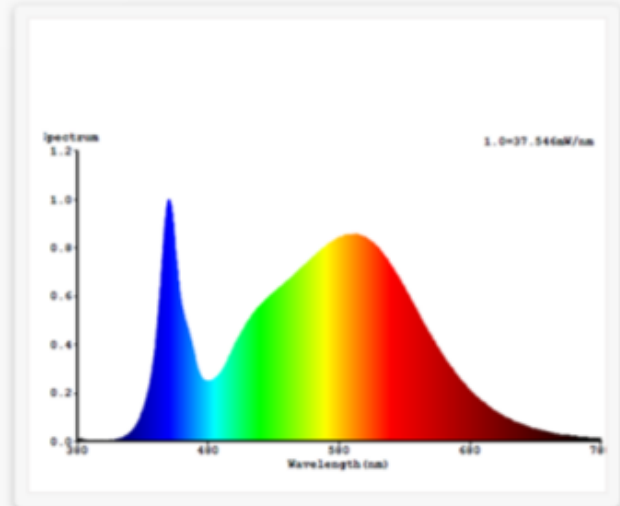

1200/1500mm/1800mm Single or Double

Model	ETW-BO-18W (1200mm Single)	ETW-BO-36W (1200mm Double)	ETW-BO-25W (1500mm Single)	ETW-BO-50W (1500mm Double)	ETW-BO-29W (1800mm Single)	ETW-BO-58W (1800mm Double)
Luminaire Rated Power Consumption	18W	2x 18W	25W	2x23W	29W	58W
Lumens	1530	3060	2125	4250	2465	4930
Luminous Efficiency lm/w	85	85	85	85	85	85
Dimensions	1200mm	1200mm	1500mm	1500mm	1800mm	1800mm
Voltage	220V	220V	220V	220V	220V	220V
Material	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium



China Office
 20A, Tower 3, Tianshan Rd 600
 Shanghai, 200051, China
www.ecotecworld.com

Germany Office
 Kappenberghof 8,
 D-49843 Uelsen, Germany
www.ecotecworld.com

HK office
 Room 1203, Euro Trade
 Centre 13-14 Connaught
 Road, HK
www.ecotecworld.com

UK Office
 30 St Giles Oxford
 OX13LE, UK
www.ecotecworld.com