



## LED Batten for Outdoor Use



## Features

- Single ended power for ultimate safety
- Surge protector system
- Low electromagnetic interference
- 45,000 hour lifetime

## Applications


- Car parks
- Schools
- Hospitals
- Public buildings

## Technical Specification

➤ <b>Beam Angle</b>	140°
➤ <b>Colour Rendering (RA)</b>	80
➤ <b>CCT</b>	4000K, 5000K, 6000K
➤ <b>Operating Temperature</b>	20°~45°
➤ <b>IP Rating</b>	IP65
➤ <b>Certifications</b>	CE & ROHS, 'ECA Compliant', LM-79, LM-80
➤ <b>Driver</b>	Internal
➤ <b>Energy Rating</b>	A
➤ <b>LED Chip</b>	Nichia/ Epistar

## Replaces

- 1x25W replaces the Single Batten T8 58W
- 2X25W replaces the Double Batten T8 2x58W

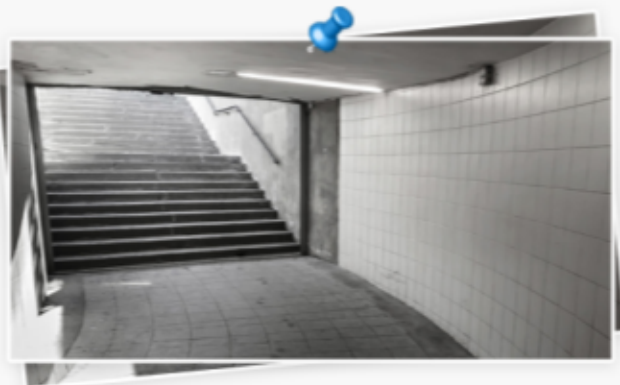

◆ **China Office**  
◆ 20A, Tower 3, Tianshan Rd 600  
Shanghai, 200051, China  
◆ [www.ecotecworld.com](http://www.ecotecworld.com)

◆ **Germany Office**  
◆ Kappenberghof 8,  
D-49843 Uelsen, Germany  
◆ [www.ecotecworld.com](http://www.ecotecworld.com)

◆ **HK office**  
◆ Room 1203, Euro Trade  
Centre 13-14 Connaught  
Road, HK  
◆ [www.ecotecworld.com](http://www.ecotecworld.com)

◆ **UK Office**  
◆ 30 St Giles Oxford  
OX13LE, UK  
◆ [www.ecotecworld.com](http://www.ecotecworld.com)