



LED Commercial Downlight



Features


- ➔ Ultra-high colour rendering
- ➔ Diffused cover to protect against glare
- ➔ 50,000 hour lifetime
- ➔ High efficiency and energy saving

Applications

- ➔ Retail ➔ Public Venues ➔ Restaurants
- ➔ Hotels ➔ Bars ➔ Clubs

Technical Specification

➔ Beam Angle	60°
➔ Colour Rendering (RA)	80
➔ CCT	3000K, 4500K, 6000K
➔ Operating Temperature	-25°~40°
➔ IP Rating	IP20
➔ Certifications	CE & ROHS, 'ECA Compliant', LM-79, LM-80
➔ Driver	External
➔ Energy Rating	A

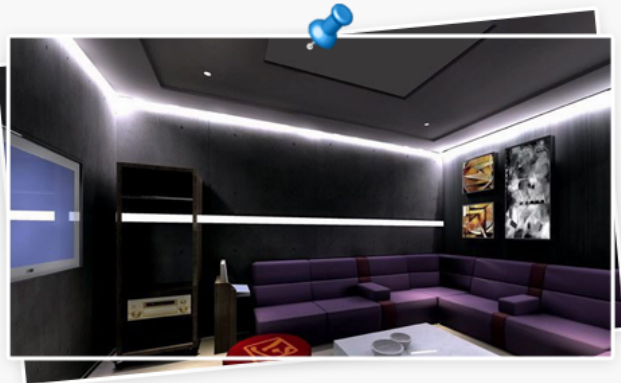

sustainable growth

📍 **China Office**
20A, Tower 3, Tianshan Rd 600
Shanghai, 200051, China
🌐 www.ecotecworld.com

📍 **Germany Office**
Kappenberghof 8,
D-49843 Uelsen, Germany
🌐 www.ecotecworld.com



📍 **HK office**
Room 1203, Euro Trade
Centre 13-14 Connaught
Road, HK
🌐 www.ecotecworld.com

📍 **UK Office**
30 St Giles Oxford
OX13LE, UK
🌐 www.ecotecworld.com



Light Distribution Curves 25W

Colour Rendering 25W

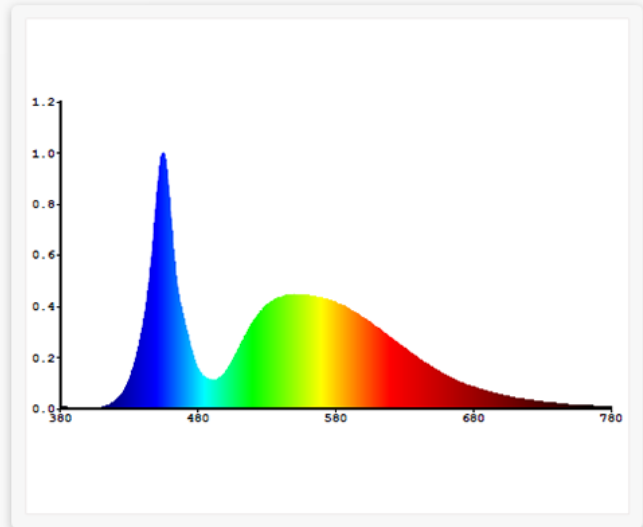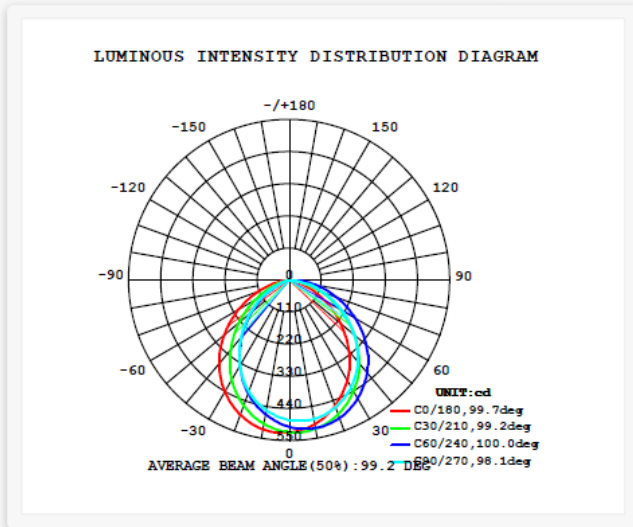

7/10/15/20/25W

Model	ETW-CD-7/10W ⁽⁴⁾	ETW-CD-10/15W ⁽⁵⁾	ETW-CD-15/20W ⁽⁶⁾	ETW-CD-20/25W ⁽⁸⁾
Luminaire Rated Power Consumption	7/10W	10/15W	15/20W	20/25W
Lumens	560/800	800/1200	1200/1600	1600/2240
Luminous Efficiency lm/w	80	80	80	80
Dimensions	115x141x60mm	139x165x60mm	164x190x60mm	215x240x60mm
Voltage	100-264V	100-264V	100-264V	100-264V



sustainable growth

China Office
 20A, Tower 3, Tianshan Rd 600
 Shanghai, 200051, China
www.ecotecworld.com

Germany Office
 Kapfenberghof 8,
 D-49843 Uelsen, Germany
www.ecotecworld.com

HK office
 Room 1203, Euro Trade
 Centre 13-14 Connaught
 Road, HK
www.ecotecworld.com

UK Office
 30 St Giles Oxford
 OX13LE, UK
www.ecotecworld.com