



## LED Office Luminaire 600x600mm



## Features

- ➔ Single ended power for ultimate safety
- ➔ Surge protector system
- ➔ Low electromagnetic interference
- ➔ 45,000 hour lifetime

## Applications

- ➔ Offices ➔ Schools ➔ Hospitals
- ➔ Public buildings

## Technical Specification

➔ <b>Beam Angle</b>	140°
➔ <b>Colour Rendering (RA)</b>	80
➔ <b>CCT</b>	4000K, 5000K, 6000K
➔ <b>Operating Temperature</b>	-20°~45°
➔ <b>IP Rating</b>	IP20
➔ <b>Certifications</b>	CE & ROHS, 'ECA Compliant', LM-79, LM-80
➔ <b>Driver</b>	Internal
➔ <b>Energy Rating</b>	A
➔ <b>Led Chip</b>	Nichia/ Epistar

## Replaces

- ➔ 4x9W LED replaces 4x18W T8 luminaire
- ➔ 3x9W LED replaces 3x18W T8 luminaire



sustainable growth

 **China Office**  
20A, Tower 3, Tianshan Rd 600  
Shanghai, 200051, China  
 [www.ecotecworld.com](http://www.ecotecworld.com)


 **Germany Office**  
Kappenberghof 8,  
D-49843 Uelsen, Germany  
 [www.ecotecworld.com](http://www.ecotecworld.com)

 **HK office**  
Room 1203, Euro Trade  
Centre 13-14 Connaught  
Road, HK  
 [www.ecotecworld.com](http://www.ecotecworld.com)


 **UK Office**  
30 St Giles Oxford  
OX13LE, UK  
 [www.ecotecworld.com](http://www.ecotecworld.com)



## Light Distribution Curves 36W

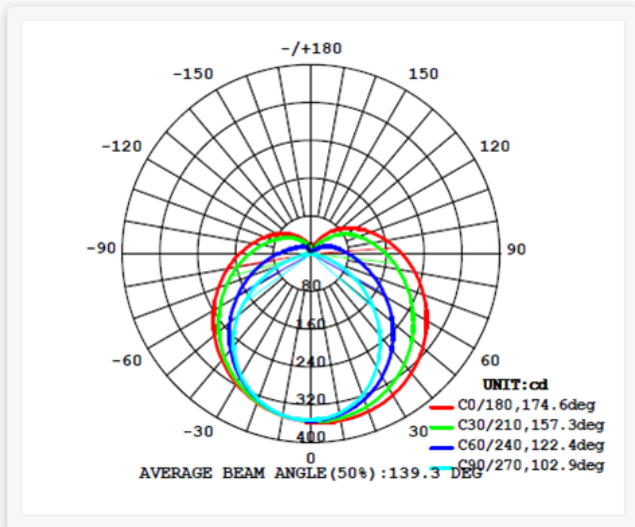

## Colour Rendering 36W

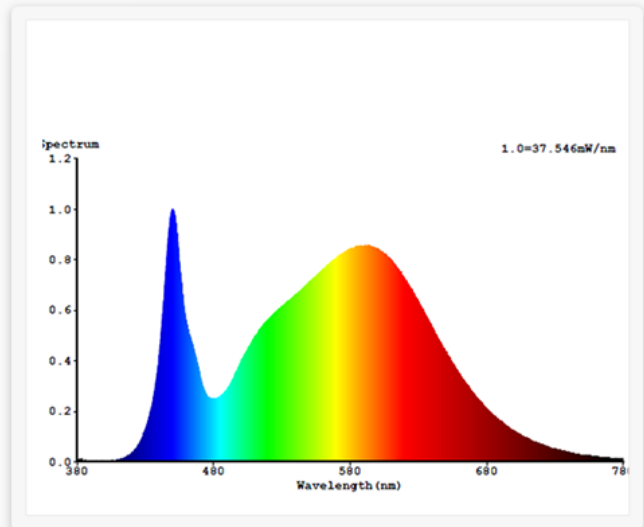

## 4x9W/3x19W

➔ Model	ETW-LO06-36W (600x600mm)	ETW-LO06-27W (600x600mm)
➔ Luminaire Rated Power Consumption	4x9W	3x9W
➔ Lumens	3060	2295
➔ Luminous Efficiency lm/w	100	100
➔ Dimensions	600x600mm	600x600mm
➔ Voltage	220V	220V
➔ Material	Aluminium	Aluminium
➔ No. LED Chips	4x160	3x160