



LED Office Luminaire 1200x600mm



Features

- ➔ Single ended power for ultimate safety
- ➔ Surge protector system
- ➔ Low electromagnetic interference
- ➔ 45,000 hour lifetime

Applications

- ➔ Offices ➔ Schools ➔ Hospitals
- ➔ Public buildings

Technical Specification

| | |
|--------------------------------|--|
| ➔ Beam Angle | 140° |
| ➔ Colour Rendering (RA) | 80 |
| ➔ CCT | 4000K, 5000K, 6000K |
| ➔ Operating Temperature | -20°~45° |
| ➔ IP Rating | IP20 |
| ➔ Certifications | CE & ROHS, 'ECA Compliant', LM-79, LM-80 |
| ➔ Driver | Internal |
| ➔ Energy Rating | A |
| ➔ LED Chip | Nichia/ Epistar |

Replaces

- ➔ 4x18W LED replaces 4x36W T8 luminaire
- ➔ 3x18W LED replaces 3x36W T8 luminaire
- ➔ 2x18W LED replaces 2x36W T8 luminaire



sustainable growth

China Office

20A, Tower 3, Tianshan Rd 600
Shanghai, 200051, China
www.ecotecworld.com

Germany Office

Kappenberghof 8,
D-49843 Uelsen, Germany
www.ecotecworld.com

HK office

Room 1203, Euro Trade
Centre 13-14 Connaught
Road, HK
www.ecotecworld.com



UK Office

30 St Giles Oxford
OX13LE, UK
www.ecotecworld.com



Light Distribution Curves 72W

Colour Rendering 72W

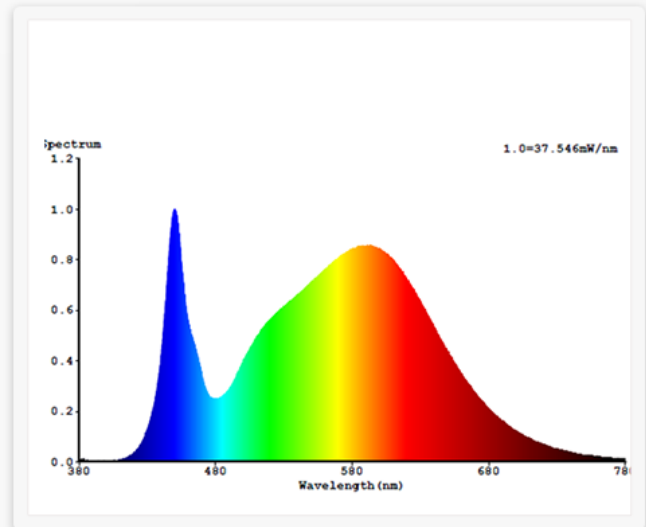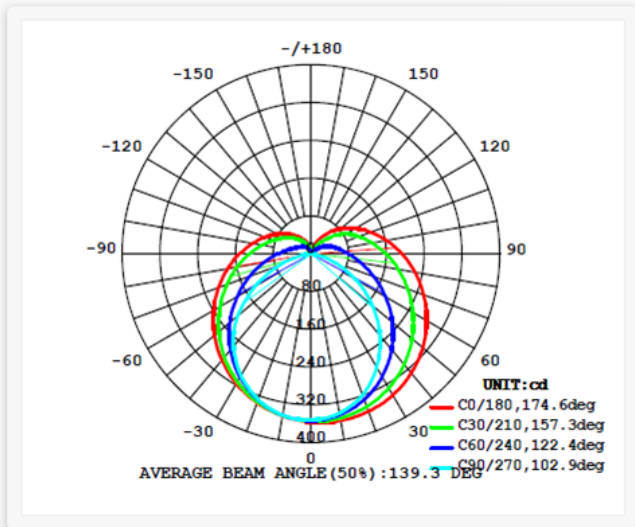

4x18/3x18/2x18

| Model | ETW-LO12-72W (1200x600mm) | ETW-LO12-54W (1200x600mm) | ETW-LO12-36W (1200x600mm) |
|-----------------------------------|------------------------------|------------------------------|------------------------------|
| Luminaire Rated Power Consumption | 4x18 | 3x18 | 2x18 |
| Lumens | 6120 | 4590 | 3060 |
| Luminous Efficiency lm/w | 85 | 85 | 85 |
| Dimensions | 600x600mm | 600x600mm | 1200x600mm |
| Voltage | 220V | 220V | 220V |
| Material | Aluminium | Aluminium | Aluminium |
| No. LED Chips | 4x160 | 3x160 | 2x160 |

Different angles available on request with minimum order quantity